

MINI SPOTTY



Spotting table for cold and hot spotting.

Product codes: 4201, 4202, 4203, 4205, 4206, 4207

DESCRIZIONE: This spotting table is available in different versions: with boiler; with compressor; with suction wall. |

MAIN FEATURES



Stainless steel spotting surface



Stainless steel arm with suction



Powerful suction operated by foot pedal



Drying gun

[FIND OUT MORE](#)




Two spotting guns equipped with tanks for chemicals


[FIND OUT MORE](#)



Liquids separator

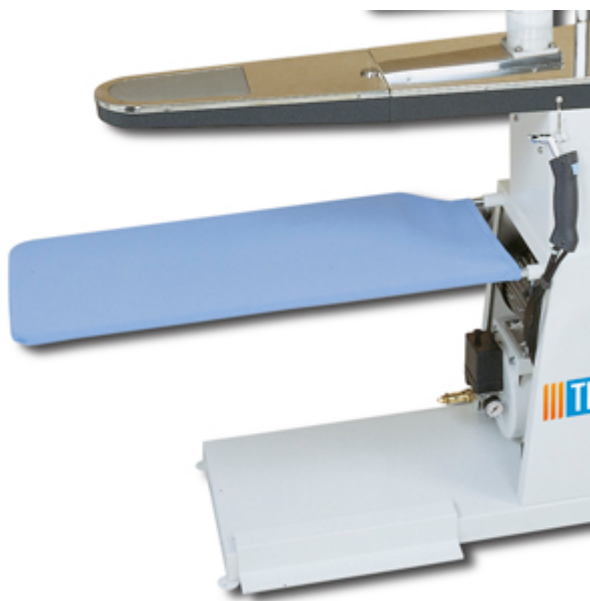


Garment tray

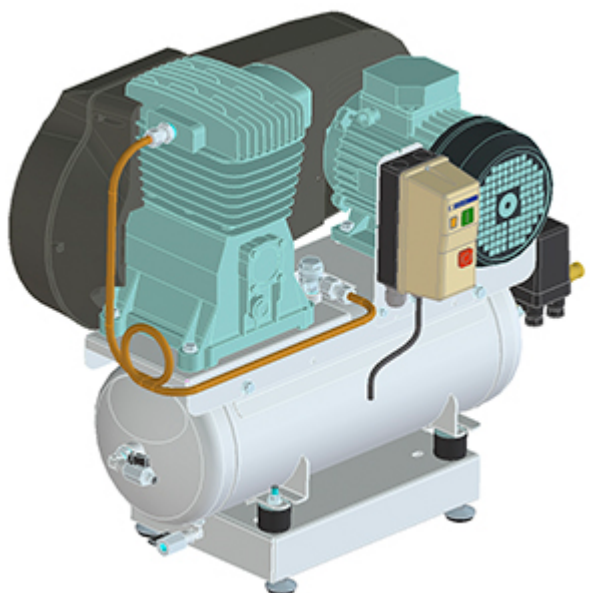

Compressor

Only on models: 4203, 4206, 4207.

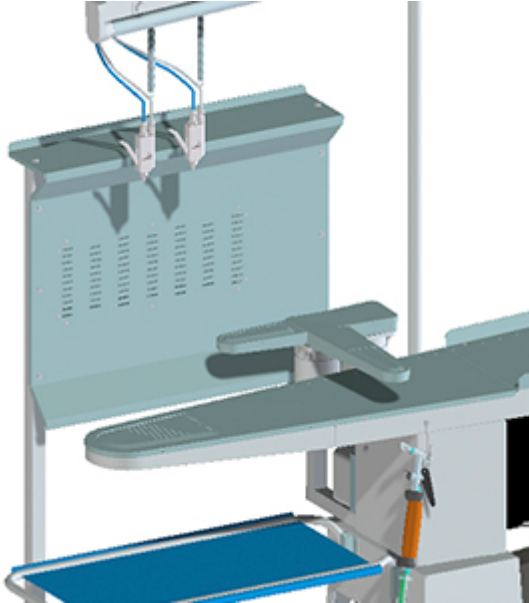**Suction wall**

Only on models: 4205, 4207.



4kW steam generator with air/steam gun

Only on models : 4202, 4206.

OPTIONAL



Steam/air gun

Only on models: 4201, 4203, 4205, 4207.

[FIND OUT MORE](#)

**5 L boiler with steam/air gun**

Only on models: 4201, 4203, 4205, 4207.

[FIND OUT MORE](#)



Stand on casters with shelf

Only on models: 4201, 4203, 4205, 4207.

TECHNICAL SPECIFICATIONS

	4201	4203	4202	4206
Description	Without compressor	With compressor	With boiler and without compressor	With boiler and with compressor
Electrical requirements	230V 50Hz 220V 60Hz 110V 60Hz	400V 3N 50Hz 220V 3 60Hz	400V 3N 50Hz 220V 3 60Hz	400V 3N 50Hz 220V 3 60Hz
Total power	0,36 kW	1,86 kW	4,73 kW	6,23 kW
Suction power	0,36 kW 0,48 HP	0,36 kW 0,48 HP	0,36 kW 0,48 HP	0,36 kW 0,48 HP
Compressor power	–	1,5 kW 2 HP	–	1,5 kW 2 HP
Total boiler power	–	–	4,37 kW	4,37 kW
Boiler resistance	–	–	4 kW	4 kW

	4201	4203	4202	4206
Pump power	–	–	0,37 kW 0,5 HP	0,37 kW 0,5 HP
Boiler volume	–	–	5 l	5 l
Steam pressure	5 bar 72 PSI	5 bar 72 PSI	5 bar 72 PSI	5 bar 72 PSI
Steam production	–	–	5,6 kg/h 12 lbs/h	5,6 kg/h 12 lbs/h
Steam consumption	1,12 kg/h (in the presence of gun A/V) 2,5 lbs/h (in the presence of gun A/V)	1,12 kg/h (in the presence of gun A/V) 2,5 lbs/h (in the presence of gun A/V)	–	–
Air pressure	800 kPa 116 PSI	800 kPa 116 PSI	800 kPa 116 PSI	800 kPa 116 PSI
Air consumption	10 NI/min 0,35 cfm	–	10 NI/min 0,35 cfm	–
Footprint	1056 x 364 mm 42" x 14"	1056 x 364 mm 42" x 14"	1056 x 364 mm 42" x 14"	1056 x 364 mm 42" x 14"
Dimensions	1316 x 414 x 917 (max 1797) mm 52" x 16" x 36" (max 71")	1462 x 463 x 917 (max 1797) mm 58" x 18" x 36" (max 71")	1316 x 512 x 917 (max 1797) mm 52" x 20" x 36" (max 71")	1462 x 545 x 917 (max 1797) mm 58" x 21" x 36" (max 71")
Net weight	45 kg 99 lbs	87 kg 192 lbs	65 kg 143 lbs	107 kg 236 lbs

	4205	4207
Description	With suction wall and without compressor	With suction wall and with compressor
Electrical requirements	230V 50Hz 220V 60Hz 110V 60Hz	400V 3N 50Hz 220V 3 60Hz
Total power	0,36 kW	1,86 kW

	4205	4207
Suction power	0,36 kW 0,48 HP	0,36 kW 0,48 HP
Compressor power	–	1,5 kW 2 HP
Steam pressure	5 bar 72 PSI	5 bar 72 PSI
Steam consumption	1,12 kg/h (in the presence of gun A/V) 2,5 lbs/h (in the presence of gun A/V)	1,12 kg/h (in the presence of gun A/V) 2,5 lbs/h (in the presence of gun A/V)
Air pressure	800 kPa 116 PSI	800 kPa 116 PSI
Air consumption	10 NI/min 0,35 cfm	–
Footprint	1056 x 364 mm 42" x 14"	1056 x 364 mm 42" x 14"
Dimensions	1316 x 494 x 917 (max 1797) mm 52" x 19" x 36" (max 71")	1462 x 543 x 917 (max 1797) mm 58" x 21" x 36" (max 71")
Net weight	65 kg 143 lbs	107 kg 236 lbs