


Family pump E - low pressure

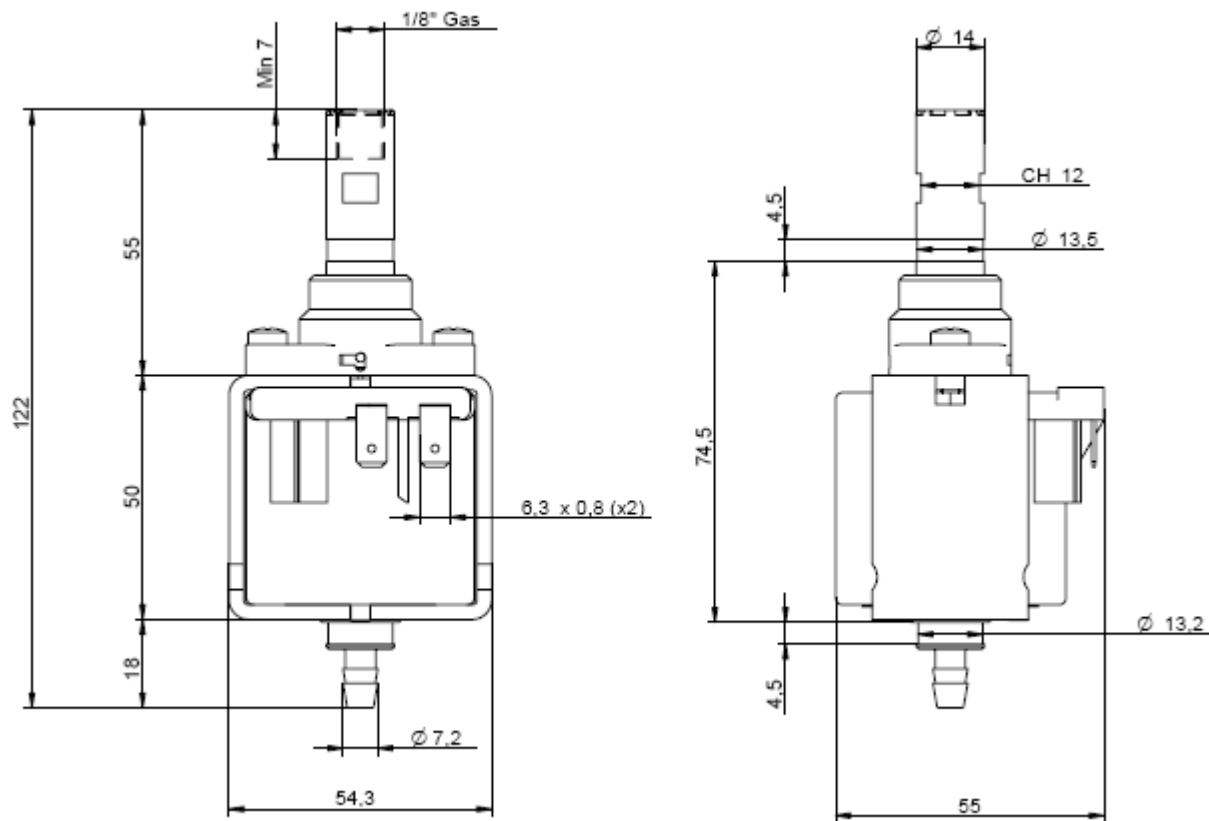

- Class see table below
- Electrical insulation, class II
- ED see table below
- Diode integrated (except for 24V)


Description	Technical data	
	Body material	PA66/POM
	Seal material	NBR (OTHER MATERIAL AVAILABLE ON REQUEST)
	Electrical connection	6,3 x 0,8 fast-on terminal
	Insulation class	F/A

"Tutte le tipologie di pompe sono progettate e verificate utilizzando come fluido l'acqua. Sconsigliamo stoccaggi lunghi e/o temperature di magazzino elevate soprattutto con pompe prive di acqua all'interno: in questi casi vi suggeriamo di contattare il nostro ufficio tecnico per consigli in proposito ad evitare malfunzionamenti delle pompe."

"Per il raccordo di uscita in plastica (versione EP) l'indicazione del filetto G 1/8\"

"All types of pumps are designed and tested using water as the fluid. We do not recommend stocks long and / or high storage temperatures above pump without water inside: in these cases, we suggest that you contact our technical department for advice in this regard to prevent malfunction of the pump."

"For the outlet fitting plastic (EP version) an indication of the thread G 1/8\"

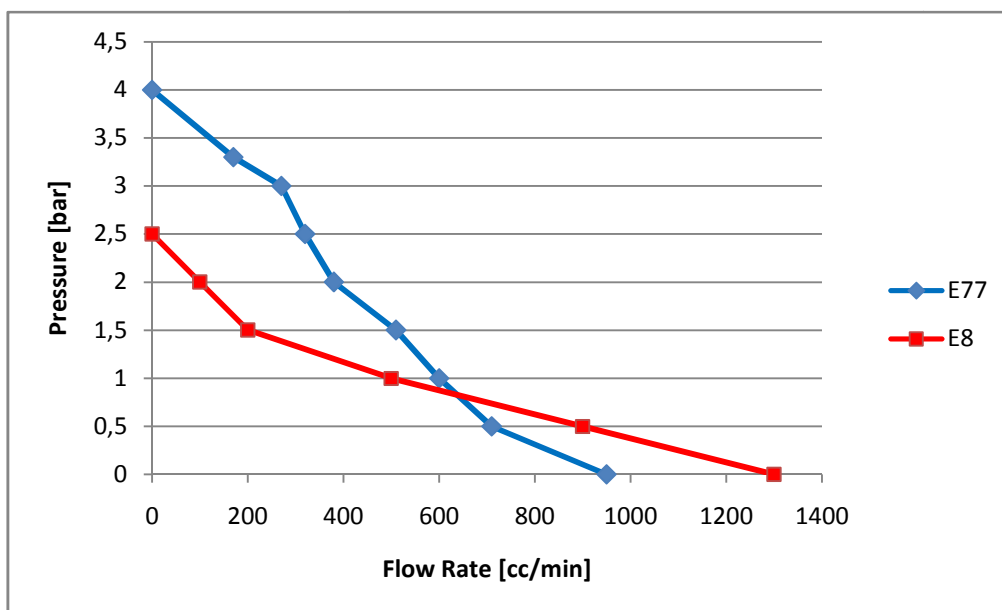

Pressure [bar]	Average Flow Rate [cc/min]	
	E77	E8
0	950	1300
0,5	710	900
1	600	500
1,5	510	200
2	380	100
2,5	320	0
3	270	---
3,3	170	---
4	0	---

Type E					
Model	Voltages	ON/OFF	Class	W	Certificates
EP77, EX77, EP77GW, EX77GW	230V~50Hz	ED 100%	F	28	VDE
	220V~50-60Hz	ED 100%	F	35	
EP77, EX77	120V~60Hz	ED 100%	A	27	UL
	100V~50-60Hz	ED 100%	F	31	
EP8, EP8GW, EP8/S, EP8GW/S	230-240V~50Hz	ED 100%	F	26	VDE
	220V~50-60Hz	ED 100%	F	33	
	120V~60Hz	ED 100%	F	29	
	100V~50-60Hz	ED 100%	F	28	c-UL
	24V~50Hz	ED 100%	F	28	